

# 1 Product information Protective Screen Film Multilayer

### 1.1 Protective Screen Film



Fig. 1 Protective Screen Film with protection-paper and remove-strap

For better use, the bottom side (display mount side) of the Protective Screen Film ist covered with an protection paper. To peel off the protection paper, please use the two remove straps (labeled "Trägerfolie").



Please see remove instructions on section 1.4

## 1.2 How to apply the Protective Screen Film

- 1.) Clean the surface of the Industrial PC touch screen with a moist cloth.
- 2.) Tear off one inch of the protection paper from the Protective Screen Film.
- 3.) Fix and adjust the Protective Screen Film with the free adhesive strip on the upper part of the surface of the touch screen.
- 4.) Tear the rest of the foil protection paper off.

  Tear off from top to bottom and from center to sides and fix the Protective Screen Film with light pressure to the touch screen.
- 5.) Rub the Film gently with the (supplied) plastic spatula from the center to the edges. Avoid air bubbles.
- i For more information see our web site under www.noax.com



#### 1.3 Technical data


noax Part-No.:	Differential for each display size
Description:	Protective Screen Film for touchpanels, Multilayer
Material:	2-layer film without glue
Thickness:	0,15mm
Adhesive layer:	Excellent grip, with residuelessly peel off, no aggressive glues
Light transmission :	>92 % in visible range (400 - 800nm)
Surface treatment:	either Anti-reflective — reduces light reflections or Crystal clear — better contrast
Temperature (operation):	32° to 212° F (-20°C to 100°C)
Resistance:	Ethanol (alcohol), most fats and oils, not full resistant against organic chemistry, acids and bases

### 1.4 Remove the Protective Screen Film



ATTENTION: Remove the foil carefully and slowly. Don't jerk or pull to strong, this could damage the touch

Fig. 2 Remove the Protective Screen Film

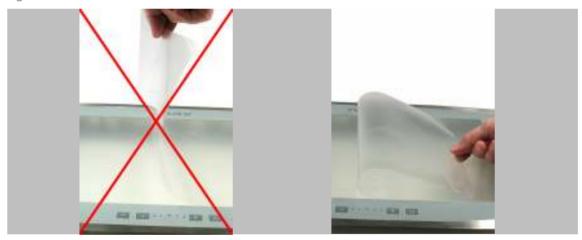

Don't remove the foil in an angle of 90 degrees to the touch surface — Remove the foil always parallel to the touch surface.



Noax will take no responsibility for damages caused by attaching or removing the Protective Screen Film! Please contact our service department if you have any questions regarding the Protective Screen Film.

# noax Technologies AG

Am Forst 6 85560 Ebersberg (Germany)

Tel. +49 (0) 8092 8536 0 Fax +49 (0) 8092 8536 55

Hotline: +49 (0) 8092 8536 33

hotline@noax.com

# noax Technologies Corp.

10130 Perimeter Parkway, Suite 230 Charlotte, NC 28216 (USA)

Phone +17049921606 Fax +17049921712

Hotline: +17049921606 hotline@noaxna.com