



1 General information on the Touch pen for the noax Industrial PCs

noax article no.:	Touch pen with ...
13503	stainless steel rope 18.5" (470 mm)
13504	stainless steel rope 26.4" (670 mm) for C19, C21 and S19
noax article no.:	Touch pen holder for
13170	screw mounting C8, C12, S15-G2 and S19 <u>or</u> adhesive mounting C15, C19, C21, S12, S15 and P15

With this Touch pen, applications with very small buttons can be operated comfortably. It also protects the display surface. Especially in very harsh environments, it reliably prevents the display contamination by dirty or greasy fingers.

It has a special holder and is connected via a stainless steel rope with the Industrial PC. The Touch pen can't be lost or misplaced.

You need the following tools for mounting:

- Phillips recessed head screwdriver, size 1 (PH 1) 
- Hexagon screwdriver, size 3,0 



For further information please see our web site www.noax.com



Fig. 1 Delivery contents

2 Technical data and delivery contents

noax article no.:	13503
Description:	Touch pen with stainless steel rope 18.5" (470 mm)
Touch pen length:	5.1" (130 mm)
Touch pen diameter:	0.335" (8.50 mm)
Stainless steel rope length:	18.5" (470 mm)
Delivery contents:	1 Touch pen with stainless steel rope pre-assembled
noax article no.:	13504
Description:	Touch pen with stainless steel rope 26.4" (670 mm)
Touch pen length:	5.1" (130 mm)
Touch pen diameter:	0.335" (8.50 mm)
Stainless steel rope length:	26.4" (670 mm)
Delivery contents:	1 Touch pen with stainless steel rope pre-assembled
noax article no.:	13170
Description:	Touch pen holder for screw and adhesive mounting
Dimensions:	21.7 inch x 0.47 inch x 0.9 inch (W x H x D) 55mm x 12mm x 23 mm (W x H x D)
Delivery contents:	1 Touch pen holder 2 Cross-head screws M3 x 6 mm 1 Hexagon socket screw M3 x 6 mm 1 Adhesive pad 1 Cleaning cloth for self-adhesive compounds

3 Installation notes for the Touch pen with holder for screw mounting on C8, C12, S15-G2 and S19

Illustrated here using the example on a noax compact Industrial PC.

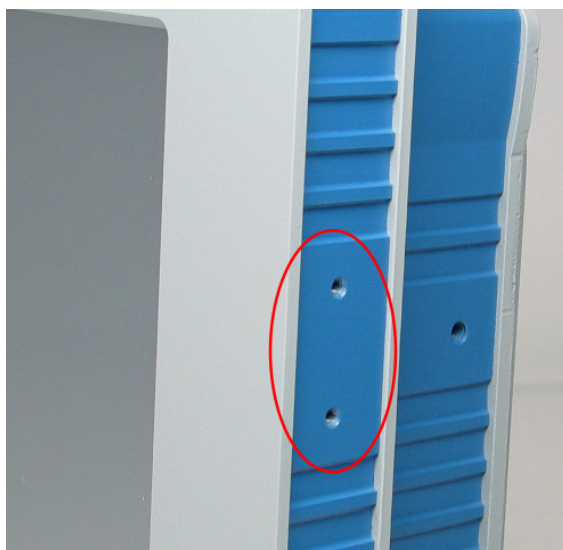


Fig. 2 Mounting option

- ▶ The Touch pen holder can be mounted either on the right or left side of the display.
- ▶ Remove any screws in the desired fixing for the holder.
(see mark in the left figure)

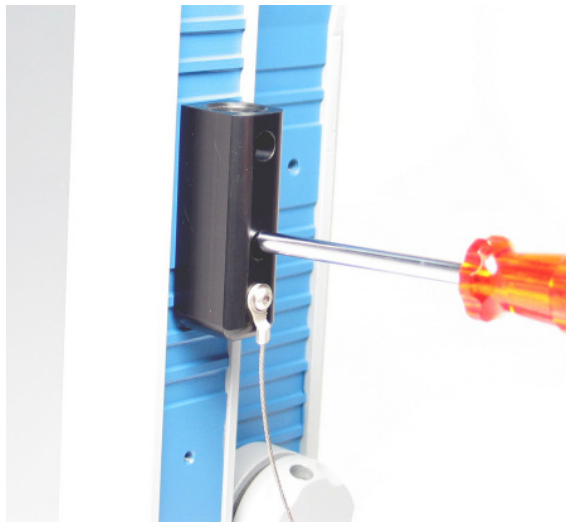


Fig. 3 Mounting the holder

- ▶ Fix the Touch pen holder with the two cross-head screws M3 x 6mm (see figure).
- ▶ Fix the stainless steel rope with the hexagon socket screw M3 x 6mm to the Touch pen holder (see figure).
- ⓘ Do not use any washers or locking washers. These will not fit through the mounting holes in the holder.

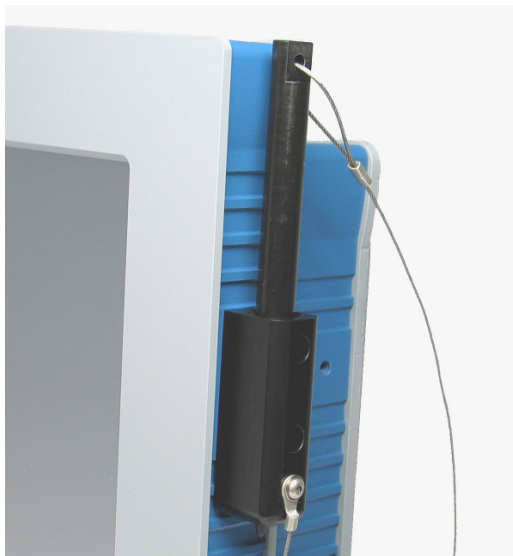


Fig. 4 Touch pen holder completely mounted

4 Installation notes for the Touch pen with holder for adhesive mounting on C15, C19, C21, S12, S15 and P15

Illustrated here using the example on a noax compact Industrial PC without mounting holes.



Fig. 5 Adhesive pad on the holder

- ▶ Clean the Touch pen holder-bottom side and the desired location on your IPC with the supplied cleaning cloth

- ① We recommend to attach the touch pen holder at the side of the display (see Fig. 6).

- ▶ Peel off the adhesive carrier and stick the adhesive pad to the touch pen holder (see figure left)



Fig. 6 Touch pen holder

- ▶ Peel off the adhesive carrier on the touch pen holder and stick it to the display (see figure left)



Fig. 7 Touch pen holder completely mounted

- ▶ Fix the stainless steel rope with the hexagon socket screw M3 x 6mm to the Touch pen holder (see figure).

noax Technologies AG

Am Forst 6
85560 Ebersberg (Germany)

Tel. +49 (0) 8092 8536 0
Fax +49 (0) 8092 8536 55

Hotline: +49 (0) 8092 8536 33
hotline@noax.com

noax Technologies Corp.

10130 Perimeter Parkway, Suite 230
Charlotte, NC 28216 (USA)

Phone +1 704 992 1606
Fax +1 704 992 1712

Hotline: +1 704 992 1606
hotline@noaxna.com